

ADD: Room 302, Unit 2, East 109, Yongsheng Community, Yiwu,
Zhejiang, China
TEL: +86-15967929706
Email: contact@onon-bm.com
ZIP: 322000
WEB: www.onon-bm.com

Ringlock

Scaffolding



STANDARD


EN74 ● EN12811 ● BS1139 ● AS1576

Yiwu Onon Building Materials Co., LTD



Ringlock Scaffolding

Vertical Standard

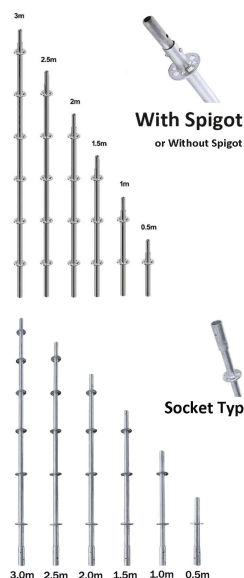

Material: Q355 / S355JR

Surface Treatment: Hot-dip Galvanized

Diameter: 48.3mm or 60.3mm

Thickness: 3.25mm or 3.2mm or 3.0mm

Length: 0.5-4m

Code#	Code#	Length			Material	Diameter mm	Thickness mm
	With Spigot	cm	mm	inch			
RS50	RS50S	50	500	1'64"	Q355 S355JR	48.3	3.25/3.2/3.0
RS100	RS100S	100	1000	3'3"			
RS150	RS150S	150	1500	4'11"			
RS200	RS200S	200	2000	6'6"			
RS250	RS250S	250	2500	8'2"			
RS300	RS300S	300	3000	9'9"			
RS400	RS400S	400	4000	13'12"			

With Spigot

Code#	Length			Material	Diameter mm	Thickness mm
	With Spigot	cm	mm			
RS650S	50	500	1'64"	Q355 S355JR	60.3	3.25/3.2
RS6100S	100	1000	3'3"			
RS6150S	150	1500	4'11"			
RS6200S	200	2000	6'6"			
RS6250S	250	2500	8'2"			
RS6300S	300	3000	9'9"			
RS6400S	400	4000	13'12"			

With Spigot

O-Ledger


Material: Q235 / S235JR

Surface Treatment: Hot-dip Galvanized

Diameter: 48.3mm

Thickness: 3.2mm or 3.0mm or 2.75mm

Length: 0.3-3.07m / 1'-10'

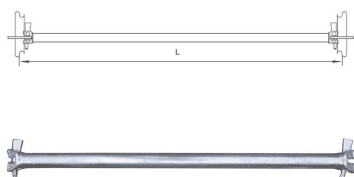

Code#	Length			Material	Diameter mm	Thickness mm	Note
	cm	mm	inch				
RH30	30	300	1'	Q235/S235JR	48.3	3.2/3.0/2.75	A
RH60	60	600	2'				A
RH73	73	730	2'5"				B
RH90	90	900	3'				A
RH109	109	1090	3'7"				B
RH120	120	1200	3'11"				A
RH140	140	1400	4'7"				B
RH150	150	1500	4'11"				A
RH157	157	1570	5'2"				B
RH180	180	1800	5'11"				A
RH200	200	2000	6'6"				A
RH207	207	2070	6'10"				B
RH257	257	2570	8'5"				B
RH307	307	3070	10'				B

*Note "A" Horizontal O-Ledger length are commonly used in Asian and African markets;

*Note "B" Horizontal O-Ledger length can be replaced by European and American brands.

Ringlock Scaffolding

U-Ledger



Reinforced U-Ledger

Material: Q235 / S235JR
Surface Treatment: Hot-dip Galvanized
Length: 0.3-3.07m / 1'-10'

Code#	Length			Material	Diameter mm	Thickness mm	Note
	cm	mm	inch				
RHU30	30	300	1'	Q235/S235JR	55x55x50	3.0	A
RHU60	60	600	2'				A
RHU73	73	730	2'5"				B
RHU90	90	900	3'				A
RHU109	109	1090	3'7"				B
RHU120	120	1200	3'11"				A
RHU140	140	1400	4'7"				B, #
RHU150	150	1500	4'11"				A, #
RHU157	157	1570	5'2"				B, #
RHU180	180	1800	5'11"				A, #
RHU200	200	2000	6'6"				A, #
RHU207	207	2070	6'10"				B, #
RHU257	257	2570	8'5"				B, #
RHU307	307	3070	10'				B, #

*Note "A" Horizontal U-Ledger length are commonly used in Asian and African markets;

*Note "B" Horizontal U-Ledger length can be replaced by European and American brands;

*Note "#" Horizontal U-Ledger are reinforced.

Double O-Ledger





Material: Q235 / S235JR
Surface Treatment: Hot-dip Galvanized
Diameter: 48.3mm
Thickness: 3.2mm or 3.0mm
Length: 1.4-3.07m / 4'7"-10'

Code#	Length			Material	Diameter mm	Thickness mm	Note
	cm	mm	inch				
RDL140	140	1400	4'7"	Q235/S235JR	48.3	3.2/3.0	B
RDL150	150	1500	4'11"				A
RDL157	157	1570	5'2"				B
RDL180	180	1800	5'11"				A
RDL200	200	2000	6'6"				A
RDL207	207	2070	6'10"				B
RDL257	257	2570	8'5"				B
RDL307	307	3070	10'				B

*Note "A" Double O-Ledger length are commonly used in Asian and African markets;

*Note "B" Double O-Ledger length can be replaced by European and American brands.

Bridge O-Ledger

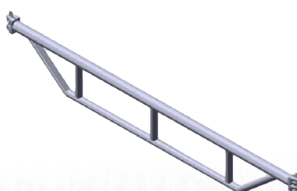

Material: Q235 / S235JR
Surface Treatment: Hot-dip Galvanized
Diameter: 48.3mm
Thickness: 3.2mm or 3.0mm
Length: 1.4-3.07m / 4'7"-10'

Code#	Length			Material	Diameter mm	Thickness mm	Note
	cm	mm	inch				
RBL140	140	1400	4'7"	Q235/S235JR	48.3	3.2/3.0	B
RBL150	150	1500	4'11"				A
RBL157	157	1570	5'2"				B
RBL180	180	1800	5'11"				A
RBL200	200	2000	6'6"				A
RBL207	207	2070	6'10"				B
RBL257	257	2570	8'5"				B
RBL307	307	3070	10'				B

*Note "A" Bridge O-Ledger length are commonly used in Asian and African markets;

*Note "B" Bridge O-Ledger length can be replaced by European and American brands.

Ringlock Scaffolding

Bridge U-Ledger

Material: Q235 / S235JR
Surface Treatment: Hot-dip Galvanized
Diameter: 48.3mm
Thickness: 3.0mm
Length: 1.4-3.07m / 4'7"-10'




Code#	Length			Material	Diameter mm	Thickness mm	Note
	cm	mm	inch				
RBLU140	140	1400	4'7"	Q235/S235JR	48.3 55x55x50	3.0	B
RBLU150	150	1500	4'11"				A
RBLU157	157	1570	5'2"				B
RBLU180	180	1800	5'11"				A
RBLU200	200	2000	6'6"				A
RBLU207	207	2070	6'10"				B
RBLU257	257	2570	8'5"				B
RBLU307	307	3070	10'				B

*Note "A" Bridge U-Ledger length are commonly used in Asian and African markets;
 *Note "B" Bridge U-Ledger length can be replaced by European and American brands.

O-Lattice Beam

Material: Q235 / S235JR
Surface Treatment: Hot-dip Galvanized
Diameter: 48.3mm
Thickness: 3.2mm or 3.0mm
Length: 1.8-6.14m / 5'11"-20'2"

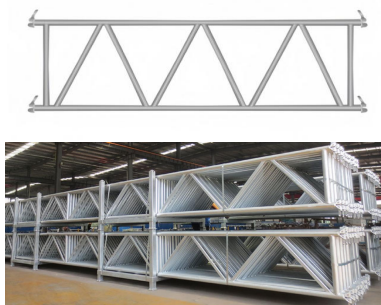


Code#	Length			Material	Diameter mm	Thickness mm	Note
	cm	mm	inch				
RLB180	180	1800	5'11"	Q235/S235JR	48.3	3.2/3.0	A
RLB200	200	2000	6'6"				A
RLB207	207	2070	6'10"				B
RLB257	257	2570	8'5"				B
RLB300	300	3000	9'10"				A
RLB307	307	3070	10'				B
RLB360	360	3600	11'10"				A
RLB400	400	4000	13'1"				A
RLB414	414	4140	13'7"				B
RLB500	500	5000	16'5"				A
RLB514	514	5140	16'10"				B
RLB600	600	6000	19'8"				A
RLB614	614	6140	20'2"				B

*Note "A" O-Lattice Beam length are commonly used in Asian and African markets;
 *Note "B" O-Lattice Beam length can be replaced by European and American brands.

U-Lattice Beam

Material: Q235 / S235JR
Surface Treatment: Hot-dip Galvanized
Diameter: 48.3mm
Thickness: 3.0mm
Length: 1.8-6.14m / 5'11"-20'2"

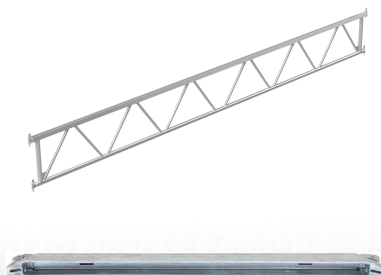

Code#	Length			Material	Diameter mm	Thickness mm	Note
	cm	mm	inch				
RLBU180	180	1800	5'11"	Q235/S235JR	48.3 55x55x50	3.2/3.0	A
RLBU200	200	2000	6'6"				A
RLBU207	207	2070	6'10"				B
RLBU257	257	2570	8'5"				B
RLBU300	300	3000	9'10"				A
RLBU307	307	3070	10'				B
RLBU360	360	3600	11'10"				A
RLBU400	400	4000	13'1"				A
RLBU414	414	4140	13'7"				B
RLBU500	500	5000	16'5"				A
RLBU514	514	5140	16'10"				B
RLBU600	600	6000	19'8"				A
RLBU614	614	6140	20'2"				B

*Note U-Lattice Beam is suitable for U-Type Planks;
 *Note "A" U-Lattice Beam length are commonly used in Asian and African markets;
 *Note "B" U-Lattice Beam length can be replaced by European and American brands.

Ringlock Scaffolding

Transom Ledger To Ledger

Material: Q235 / S235JR

Surface Treatment: Hot-dip Galvanized

Length: 0.6-3.07m / 2'-10'



Code#	Length			Material	Diameter mm	Thickness mm	Note
	cm	mm	inch				
RTLL60	60	600	2'	Q235/S235JR	48.3	3.2/3.0/2.75	A
RTLL73	73	730	2'5"				B
RTLL90	90	900	3'				A
RTLL109	109	1090	3'7"				B
RTLL120	120	1200	3'11"				A
RTLL140	140	1400	4'7"				B
RTLL150	150	1500	4'11"				A
RTLL157	157	1570	5'2"				B
RTLL180	180	1800	5'11"				A
RTLL200	200	2000	6'6"				A
RTLL207	207	2070	6'10"				B
RTLL257	257	2570	8'5"				B
RTLL307	307	3070	10'				B

*Note "A" Transom Ledger To Ledgers are commonly used in Asian and African markets;

*Note "B" Transom Ledger To Ledger can be replaced by European and American brands;

Transom Ledger To Plank


Material: Q235 / S235JR

Surface Treatment: Hot-dip Galvanized

Diameter: 48.3mm

Thickness: 3.0mm

Length: 0.24-0.96m / 5'11"-20'2"

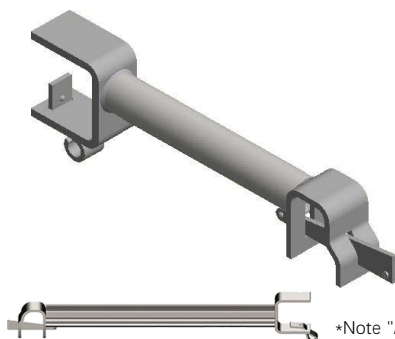

Code#	Length			Material	Diameter mm	Thickness mm	Note
	cm	mm	inch				
RTLP24	24	240	5'11"	Q235/S235JR	48.3 55x55x50	3.2/3.0	A
RTLP32	32	320	6'6"				B,U
RTLP48	48	480	6'10"				A
RTLP64	64	640	8'5"				B,U
RTLP72	72	720	9'10"				A
RTLP96	96	960	10'				B,U

*Note "A" Transom Ledger To Plank is suitable for 240mm wide O-Type & C-Type & Flat Hook Planks;

*Note "B" Transom Ledger To Plank is suitable for 320mm wide O-Type & C-Type & Flat Hook Planks;

*Note "U" Transom Ledger To Plank is suitable for 320mm wide U-Type Planks.

Transom Plank To Plank


Material: Q235 / S235JR

Surface Treatment: Hot-dip Galvanized

Diameter: 48.3mm

Thickness: 3.0mm

Length: 0.24-0.96m / 5'11"-20'2"

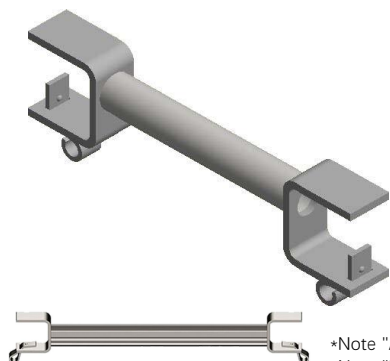

Code#	Length			Material	Diameter mm	Thickness mm	Note
	cm	mm	inch				
RTPP24	24	240	9'5"	Q235/S235JR	48.3 55x55x50	3.2/3.0	A
RTPP32	32	320	6'6"				B,U
RTPP48	48	480	6'10"				A
RTPP64	64	640	8'5"				B,U
RTPP72	72	720	9'10"				A
RTPP96	96	960	10'				B,U


*Note "A" Transom Plank To Plank is suitable for 240mm wide O-Type & C-Type & Flat Hook Planks;

*Note "B" Transom Plank To Plank is suitable for 320mm wide O-Type & C-Type & Flat Hook Planks;

*Note "U" Transom Plank To Plank is suitable for 320mm wide U-Type Planks.

Ringlock Scaffolding

Diagon Brace

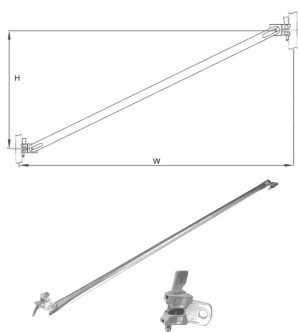

Material: Q235 / S235JR or Q195 / S195JR

Surface Treatment: Hot-dip Galvanized

Diameter: 48.3mm or 42mm

Thickness: 3.2mm or 3.0mm or 2.75mm

Length:

Code#	Specification(WxH)			Material	Diameter mm	Thickness mm	Note
	cm	mm	inch				
RD6015	60x150	600x1500	2' x 4'11"	Q235/S235JR or Q195/S195JR	48.3/42	3.2/3.0/2.75/2.5 for OD48.3	A
RD6020	60x200	600x2000	2' x 6'6"				A
RD9015	90x150	900x1500	3' x 4'11"				A
RD9020	90x200	900x2000	3' x 6'6"				A
RD1215	120x150	1200x1500	3'11" x 4'11"				A
RD1220	120x200	1200x2000	3'11" x 6'6"				A
RD1515	150x150	1500x1500	4'11" x 4'11"				A
RD1520	150x200	1500x2000	4'11" x 6'6"				A
RD1815	180x150	1800x1500	5'11" x 4'11"				A
RD1820	180x200	1800x2000	5'11" x 6'6"				A
RD2015	200x150	2000x1500	6'6" x 4'11"			2.75/2.5 for OD42	A
RD2020	200x200	2000x2000	6'6" x 6'6"				A
RD73	73x200	730x2000	2'5" x 6'6"				B
RD109	109x200	1090x2000	3'7" x 6'6"				B
RD140	140x200	1400x2000	4'7" x 6'6"				B
RD157	157x200	1570x2000	5'2" x 6'6"				B
RD207	207x200	2070x2000	6'10" x 6'6"				B
RD257	257x200	2570x2000	8'5" x 6'6"				B
RD307	307x200	3070x2000	10' x 6'6"				B

*Note "A" Diagon Brace size are commonly used in Asian and African markets;

*Note "B" Diagon Brace size can be replaced by European and American brands;

*H=0.5m/1m/2m;

*W=0.6m/0.73m/0.9m/1.09m/1.2m/1.4m/1.5m/1.57m/1.8m/2m/2.07m/2.57m/3.07m.

O-Side Bracket



Material: Q235 / S235JR

Surface Treatment: Hot-dip Galvanized

Diameter: 48.3mm

Thickness: 3.0mm

Length: 0.3-1.09m / 1'-3'7"

Code#	Length			Material	Diameter mm	Thickness mm	Note
	cm	mm	inch				
RSB30	30	300	1'	Q235/S235JR	48.3	3.0	A
RSB39	39	390					B
RSB60	60	600	2'				A
RSB73	73	730	2'5"				B
RSB90	90	900	3'				A
RSB105	105	1050					B
RSB109	109	1090	3'7"				B

*Note "A" O-Side Bracket length are commonly used in Asian and African markets;

*Note "B" O-Side Bracket length can be replaced by European and American brands.

U-Side Bracket



Material: Q235 / S235JR

Surface Treatment: Hot-dip Galvanized

Diameter: 48.3mm

Thickness: 3.0mm

Length: 0.3-1.09m / 1'-3'7"


Code#	Length			Material	Diameter mm	Thickness mm	Note
	cm	mm	inch				
RSBU30	30	300	1'	Q235/S235JR	48.3 55x55x50	3.0	A
RSBU39	39	390					B
RSBU60	60	600	2'				A
RSBU73	73	730	2'5"				B
RSBU90	90	900	3'				A
RSBU105	105	1050					B
RSBU109	109	1090	3'7"				B

*Note "A" U-Side Bracket length are commonly used in Asian and African markets;

*Note "B" U-Side Bracket length can be replaced by European and American brands.

Scaffolding Planks

Steel Plank / Deck / Platform

O-Hook				
Code#	Length		Width	
	mm	inch	mm	inch
SPO7319	730	2'5"	190	7.5"
SPO1019	1090	3'7"		
SPO1419	1400	4'7"		
SPO1519	1570	5'2"		
SPO2019	2070	6'10"		
SPO2519	2570	8'5"	320	12.6"
SPO3019	3070	10'		
SPO7332	730	2'5"		
SPO1032	1090	3'7"		
SPO1432	1400	4'7"		
SPO1532	1570	5'2"		
SPO2032	2070	6'10"		
SPO2532	2570	8'5"		
SPO3032	3070	10'		




U-Hook				
Code#	Length		Width	
	mm	inch	mm	inch
SPU7319	730	2'5"	190	7.5"
SPU1019	1090	3'7"		
SPU1419	1400	4'7"		
SPU1519	1570	5'2"		
SPU2019	2070	6'10"		
SPU2519	2570	8'5"	320	12.6"
SPU3019	3070	10'		
SPU7332	730	2'5"		
SPU1032	1090	3'7"		
SPU1432	1400	4'7"		
SPU1532	1570	5'2"		
SPU2032	2070	6'10"		
SPU2532	2570	8'5"		
SPU3032	3070	10'		




C-Hook Catwalk (Hook)				
Code#	Length		Width	
	mm	inch	mm	inch
SPC3021	300	1'	210	8.3"
SPC6021	600	2'		
SPC9021	900	3'		
SPC1221	1200	3'11"		
SPC1521	1500	4'11"		
SPC1821	1800	5'11"	240	9.5"
SPC1921	1829	6'		
SPC2021	2000	6'6"		
SPC3024	300	1'		
SPC6024	600	2'		
SPC9024	900	3'		
SPC1224	1200	3'11"	250	9.9"
SPC1524	1500	4'11"		
SPC1824	1800	5'11"		
SPC1924	1829	6'		
SPC2024	2000	6'6"		
SPC3025	300	1'	300	1'
SPC6025	600	2'		
SPC9025	900	3'		
SPC1225	1200	3'11"		
SPC1525	1500	4'11"		
SPC1825	1800	5'11"	400	1'4"
SPC1925	1829	6'		
SPC2025	2000	6'6"		
SPC3030	300	1'		
SPC6030	600	2'		
SPC9030	900	3'	480	1'7"
SPC1230	1200	3'11"		
SPC1530	1500	4'11"		
SPC1830	1800	5'11"		
SPC1930	1829	6'		
SPC2030	2000	6'6"	500	1'8"

C-Hook Catwalk (Hook)				
Code#	Length		Width	
	mm	inch	mm	inch
SPC3040	300	1'	400	1'4"
SPC6040	600	2'		
SPC9040	900	3'		
SPC1240	1200	3'11"		
SPC1540	1500	4'11"		
SPC1840	1800	5'11"	450	1'6"
SPC1940	1829	6'		
SPC2040	2000	6'6"		
SPC3045	300	1'		
SPC6045	600	2'		
SPC9045	900	3'	480	1'7"
SPC1245	1200	3'11"		
SPC1545	1500	4'11"		
SPC1845	1800	5'11"		
SPC1945	1829	6'		
SPC2045	2000	6'6"	500	1'8"
SPC3048	300	1'		
SPC6048	600	2'		
SPC9048	900	3'		
SPC1248	1200	3'11"		
SPC1548	1500	4'11"		
SPC1848	1800	5'11"	500	1'8"
SPC1948	1829	6'		
SPC2048	2000	6'6"		
SPC3050	300	1'		
SPC6050	600	2'		
SPC9050	900	3'	500	1'8"
SPC1250	1200	3'11"		
SPC1550	1500	4'11"		
SPC1850	1800	5'11"		
SPC1950	1829	6'		
SPC2050	2000	6'6"		



C-Hook Mesh Plank				
Code#	Length		Width	
	mm	inch	mm	inch
SPM3040	300	1'	400	1'4"
SPM6040	600	2'		
SPM9040	900	3'		
SPM1240	1200	3'11"		
SPM1540	1500	4'11"		
SPM1840	1800	5'11"	450	1'6"
SPM1940	1829	6'		
SPM2040	2000	6'6"		
SPM3045	300	1'		
SPM6045	600	2'		
SPM9045	900	3'	500	1'8"
SPM1245	1200	3'11"		
SPM1545	1500	4'11"		
SPM1845	1800	5'11"		
SPM1945	1829	6'		
SPM2045	2000	6'6"		

C-Hook Mesh Plank				
Code#	Length		Width	
	mm	inch	mm	inch
SPM3048	300	1'	480	1'7"
SPM6048	600	2'		
SPM9048	900	3'		
SPM1248	1200	3'11"		
SPM1548	1500	4'11"		
SPM1848	1800	5'11"	500	1'8"
SPM1948	1829	6'		
SPM2048	2000	6'6"		
SPM3050	300	1'		
SPM6050	600	2'		
SPM9050	900	3'	500	1'8"
SPM1250	1200	3'11"		
SPM1550	1500	4'11"		
SPM1850	1800	5'11"		
SPM1950	1829	6'		
SPM2050	2000	6'6"		

Scaffolding Planks

Steel Plank / Deck / Platform



Code#	Without Hook		Width	
	mm	inch	mm	inch
SP1021	1000	1'3"	210	8.3"
SP2021	2000	6'6"		
SP3021	3000	9'10"		
SP4021	4000	13'1"	240	9.5"
SP1024	1000	1'3"		
SP2024	2000	6'6"		
SP3024	3000	9'10"		
SP4025	4000	13'1"	250	9.9"
SP1025	1000	1'3"		
SP2025	2000	6'6"		
SP3025	3000	9'10"		
SP4025	4000	13'1"		

•All types of Steel Planks are available to North American specifications:
Length: 2' / 2'2" / 3' / 3'6" / 3'10" / 4' / 5' / 5'2" / 6' / 7' / 8' / 10' (3050mm)
Wide: 9.5" (240mm)

•and **Flat Hook** available:




Scaffolding Planks

Aluminum Plank / Deck / Platform

All Aluminum



O-Hook



U-Hook

Code#	O-Hook Length		Width	
	mm	inch	mm	inch
AP07319	730	2'5"	190	7.5"
AP01019	1090	3'7"		
AP01419	1400	4'7"		
AP01519	1570	5'2"		
AP02019	2070	6'10"		
AP02519	2570	8'5"	320	12.6"
AP03019	3070	10'		
AP07332	730	2'5"		
AP01032	1090	3'7"		
AP01432	1400	4'7"		
AP01532	1570	5'2"		
AP02032	2070	6'10"		
AP02532	2570	8'5"	610	2'
AP03032	3070	10'		
AP07361	730	2'5"		
AP01061	1090	3'7"		
AP01461	1400	4'7"		
AP01561	1570	5'2"		
AP02061	2070	6'10"		
AP02561	2570	8'5"		
AP03061	3070	10'		

Code#	U-Hook Length		Width	
	mm	inch	mm	inch
APU7319	730	2'5"	190	7.5"
APU1019	1090	3'7"		
APU1419	1400	4'7"		
APU1519	1570	5'2"		
APU2019	2070	6'10"		
APU2519	2570	8'5"	320	12.6"
APU3019	3070	10'		
APU7332	730	2'5"		
APU1032	1090	3'7"		
APU1432	1400	4'7"		
APU1532	1570	5'2"		
APU2032	2070	6'10"		
APU2532	2570	8'5"	610	2'
APU3032	3070	10'		
APU7361	730	2'5"		
APU1061	1090	3'7"		
APU1461	1400	4'7"		
APU1561	1570	5'2"		
APU2061	2070	6'10"		
APU2561	2570	8'5"		
APU3061	3070	10'		

All Aluminum, with TrapDoor



Code#	O-Hook with Door Length		Width	
	mm	inch	mm	inch
APDO1561	1570	5'2"	610	2'
APDO2061	2070	6'10"		
APDO2561	2570	8'5"		
APDO3061	3070	10'		

Code#	U-Hook with Door Length		Width	
	mm	inch	mm	inch
APDU1561	1570	5'2"	610	2'
APDU2061	2070	6'10"		
APDU2561	2570	8'5"		
APDU3061	3070	10'		

All Aluminum, with TrapDoor & Ladder



Code#	O-Hook with Door & Ladder Length		Width	
	mm	inch	mm	inch
APDLO2061	2070	6'10"	610	2'
APDLO2561	2570	8'5"		
APDLO3061	3070	10'		

Code#	U-Hook with Door & Ladder Length		Width	
	mm	inch	mm	inch
APDLU2061	2070	6'10"	610	2'
APDLU2561	2570	8'5"		
APDLU3061	3070	10'		

*Aluminum Planks (All Aluminum & Aluminum+Plywood) are available to North American specifications

Length: 2' / 2'2" / 3' / 3'6" / 3'10" / 4' / 5' / 5'2" / 6' / 7' / 8' / 9' / 10' (3050mm)

Wide: 19" (483mm)

*Aluminum Planks (With TrapDoor & Ladder) are available to North American specifications

Length: 2' / 2'2" / 3' / 3'6" / 3'10" / 4' / 5' / 5'2" / 6' / 7' / 8' / 9' / 10' (3050mm)

Wide: 24" (610mm) / 28" (711mm)

Scaffolding Planks

Aluminum+Plywood Plank / Deck / Platform

Aluminum+Plywood



Code#	O-Hook		Width	
	Length			
	mm	inch	mm	inch
AWO7332	730	2'5"	320	12.6"
AWO1032	1090	3'7"		
AWO1432	1400	4'7"		
AWO1532	1570	5'2"		
AWO2032	2070	6'10"		
AWO2532	2570	8'5"	610	2'
AWO3032	3070	10'		
AWO7361	730	2'5"		
AWO1061	1090	3'7"		
AWO1461	1400	4'7"		
AWO1561	1570	5'2"		
AWO2061	2070	6'10"		
AWO2561	2570	8'5"		
AWO3061	3070	10'		

Code#	U-Hook		Width	
	Length			
	mm	inch	mm	inch
AWU7332	730	2'5"	320	12.6"
AWU1032	1090	3'7"		
AWU1432	1400	4'7"		
AWU1532	1570	5'2"		
AWU2032	2070	6'10"		
AWU2532	2570	8'5"	610	2'
AWU3032	3070	10'		
AWU7361	730	2'5"		
AWU1061	1090	3'7"		
AWU1461	1400	4'7"		
AWU1561	1570	5'2"		
AWU2061	2070	6'10"		
AWU2561	2570	8'5"		
AWU3061	3070	10'		

Aluminum+Plywood, with TrapDoor



Code#	O-Hook with Door		Width	
	Length			
	mm	inch	mm	inch
AWDO1561	1570	5'2"	610	2'
AWDO2061	2070	6'10"		
AWDO2561	2570	8'5"		
AWDO3061	3070	10'		

Code#	U-Hook with Door		Width	
	Length			
	mm	inch	mm	inch
AWDU1561	1570	5'2"	610	2'
AWDU2061	2070	6'10"		
AWDU2561	2570	8'5"		
AWDU3061	3070	10'		

Aluminum+Plywood, with TrapDoor & Ladder



Code#	O-Hook with Door & Ladder		Width	
	Length			
	mm	inch	mm	inch
AWDLO2061	2070	6'10"	610	2'
AWDLO2561	2570	8'5"		
AWDLO3061	3070	10'		

Code#	U-Hook with Door & Ladder		Width	
	Length			
	mm	inch	mm	inch
AWDLU2061	2070	6'10"	610	2'
AWDLU2561	2570	8'5"		
AWDLU3061	3070	10'		

*Aluminum Planks (All Aluminum & Aluminum+Plywood) are available to North American specifications:

Length: 2' / 2'2" / 3' / 3'6" / 3'10" / 4' / 5' / 5'2" / 6' / 7' / 8' / 9' / 10' (3050mm)

Wide: 19" (483mm)

*Aluminum Planks (With TrapDoor & Ladder) are available to North American specifications:

Length: 2' / 2'2" / 3' / 3'6" / 3'10" / 4' / 5' / 5'2" / 6' / 7' / 8' / 9' / 10' (3050mm)

Wide: 24" (610mm) / 28" (711mm)

Ringlock Scaffolding

Pole Ladder

Steel Pole Ladder




With Hook

With Hook		
Code#	Length-mm	Wide-mm
LSH2040	2000	400/430
LSH2540	2500	
LSH3040	3000	
LSH4040	4000	
LSH5040	5000	
LSH6040	6000	

Without Hook		
Code#	Length-mm	Wide-mm
LS2040	2000	400/430
LS2540	2500	
LS3040	3000	
LS4040	4000	
LS5040	5000	
LS6040	6000	

Steel Pole Ladder With Spigot



With Spigot

With Spigot		
Code#	Length-inch	Wide-inch
LSF3018	3'	17"
		430mm
LSF6018	6'	



Ladder Bracket		
Code#	Length-inch	Wide-inch
LSB18	/	17"
		430mm


Aluminum Pole Ladder



Without Hook		
Code#	Length-mm	Wide-mm
LA2040	2000	400/430
LA2540	2500	
LA3040	3000	
LA4040	4000	
LA5040	5000	
LA6040	6000	

Ringlock Scaffolding

Stair

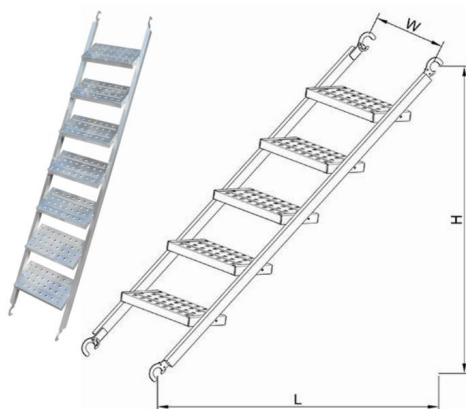

Steel Stair (H-Type, With Planks)							
Code#	Length		High		Width		Note
	mm	inch	mm	inch	mm	inch	
SSHP151545	1500	4'11"	1500	4'11"	450	1'6"	A
SSHP161545	1570	5'2"					B
SSHP181545	1800	5'11"					A
SSHP201545	2000	6'6"					A
SSHP211545	2070	6'10"					B
SSHP152045	1500	4'11"					A
SSHP162045	1570	5'2"					B
SSHP182045	1800	5'11"					A
SSHP202045	2000	6'6"					A
SSHP212045	2070	6'10"					B
SSHP151560	1500	4'11"	1500	4'11"	600	2'	A
SSHP161560	1570	5'2"					B
SSHP181560	1800	5'11"					A
SSHP201560	2000	6'6"					A
SSHP211560	2070	6'10"					B
SSHP152060	1500	4'11"					A
SSHP162060	1570	5'2"					B
SSHP182060	1800	5'11"					A
SSHP202060	2000	6'6"					A
SSHP212060	2070	6'10"					B
SSHP151590	1500	4'11"	1500	4'11"	900	3'	A
SSHP161590	1570	5'2"					B
SSHP181590	1800	5'11"					A
SSHP201590	2000	6'6"					A
SSHP211590	2070	6'10"					B
SSHP152090	1500	4'11"					A
SSHP162090	1570	5'2"					B
SSHP182090	1800	5'11"					A
SSHP202090	2000	6'6"					A
SSHP212090	2070	6'10"					B
SSHP151512	1500	4'11"	1500	4'11"	1200	3'11"	A
SSHP161512	1570	5'2"					B
SSHP181512	1800	5'11"					A
SSHP201512	2000	6'6"					A
SSHP211512	2070	6'10"					B
SSHP152012	1500	4'11"					A
SSHP162012	1570	5'2"					B
SSHP182012	1800	5'11"					A
SSHP202012	2000	6'6"					A
SSHP212012	2070	6'10"					B
SSHP151515	1500	4'11"	1500	4'11"	1500	4'11"	A
SSHP161515	1570	5'2"					B
SSHP181515	1800	5'11"					A
SSHP201515	2000	6'6"					A
SSHP211515	2070	6'10"					B
SSHP152015	1500	4'11"					A
SSHP162015	1570	5'2"					B
SSHP182015	1800	5'11"					A
SSHP202015	2000	6'6"					A
SSHP212015	2070	6'10"					B

*Note "A" *Steel Stair (H-Type, With Planks)* are commonly used in Asian and African markets;

*Note "B" *Steel Stair (H-Type, With Planks)* can be replaced by European and American brands.


Ringlock Scaffolding

Stair



Steel Stair Stringer _ A-Type							
Code#	Length		High		Width		Steps Note
	mm	inch	mm	inch	mm	inch	
SSSA2120R	2130	7'	2000	6'6"	/	/	10 Right
SSSA2120L							Left
SSSA2110R	2130	7'	1000	3'4"	/	/	5 Right
SSSA2110L							Left
SSSA813T	/	/	/	/	813	32"	/ Tread

*The **Stringer** must be used in pairs in order to support the Stair **Treads**.



Steel Stair Stringer _ E-Type							
Code#	Length		High		Width		Steps Note
	mm	inch	mm	inch	mm	inch	
SSSE73502	730	2'5"	500	1'8"	/	/	2 O
SSSE15105	1570	5'2"	1000	3'4"	/	/	5 O
SSSE25158	2570	8'5"	1500	4'11"	/	/	8 O
SSSE25209	2570	8'5"	2000	6'6"	/	/	9 O
SSSE73502U	730	2'5"	500	1'8"	/	/	2 U
SSSE15105U	1570	5'2"	1000	3'4"	/	/	5 U
SSSE25158U	2570	8'5"	1500	4'11"	/	/	8 U
SSSE25209U	2570	8'5"	2000	6'6"	/	/	9 U

*Note "O" Stringer must use O-Type Planks(320mm);

*Note "U" Stringer must use U-Type Planks(320mm).



Steel Stair With Handrails (Sets)							
Code#	Length		High		Width		Steps Note
	mm	inch	mm	inch	mm	inch	
SSH705060	/	7'	/	5'	/	/	
SSH706460	/	7'	/	6'4"	600	24"	
SSH706760	/	7'	/	6'7"	/	/	
SSH805060	/	8'	/	5'	/	/	
SSH806460	/	8'	/	6'4"	600	24"	
SSH806760	/	8'	/	6'7"	/	/	



Aluminum Stair							
Code#	Length		High		Width		Steps Note
	mm	inch	mm	inch	mm	inch	
AS70506009	/	7'	/	5'	/	/	9 O, F
AS70646010	/	7'	/	6'4"	600	24"	10 O, F
AS70676010	/	7'	/	6'7"	/	/	10 O, F
AS80506009	/	8'	/	5'	/	/	9 O, F
AS80646010	/	8'	/	6'4"	600	24"	10 O, F
AS80676010	/	8'	/	6'7"	/	/	10 O, F
AS10676011	*3050	*10'	/	6'7"	600	24"	11 O, F
AS25156409	2570	8'5"	1500	4'11"	/	/	9 O
AS25206411	2570	8'5"	2000	6'6"	640	2'1"	11 O
AS30206411	3070	10'	2000	6'6"	/	/	11 O
AS25156409U	2570	8'5"	1500	4'11"	/	/	9 U
AS25206411U	2570	8'5"	2000	6'6"	640	2'1"	11 U
AS30206411U	3070	10'	2000	6'6"	/	/	11 U

*Note "F" Aluminum Stairs are suitable for Frame Scaffolding system;

*Note "O" Aluminum Stairs are suitable for O-Ledger;

*Note "U" Aluminum Stairs are suitable for U-Ledger.

Ringlock Scaffolding

Coupler /Clamp

BS1139 / EN74, Forged



Swivel Coupler

Material: Q235 / S235JR
Surface: Hot-dip Galvanized
Specification: Forged

Code: CPFSW



Half Coupler

Material: Q235 / S235JR
Surface: Hot-dip Galvanized
Specification: Forged

Code: CPFHA



Putlog Coupler

Material: Q235 / S235JR
Surface: Hot-dip Galvanized
Specification: Forged

Code: CPFPU



Joint Pin Coupler

Material: Q235 / S235JR
Surface: Hot-dip Galvanized
Specification: Forged

Code: CPFJP



Right Angle Coupler

Material: Q235 / S235JR
Surface: Hot-dip Galvanized
Specification: Forged

Code: CPFRA



Beam Coupler

Material: Q235 / S237JR
Surface: Hot-dip Galvanized
Specification: Forged

Code: CPFBE



Board Coupler

Material: Q235 / S235JR
Surface: Hot-dip Galvanized
Specification: Forged

Code: CPFBO

BS1139 / EN74 / JIS, Pressed



Swivel Coupler

Material: Q235 / S235JR
Surface: Galvanized
Specification: Pressed

Code: CPPSW



Putlog Coupler

Material: Q235 / S237JR
Surface: Galvanized
Specification: Pressed

Code: CPPPU



Joint Pin Coupler

Material: Q235 / S235JR
Surface: Galvanized
Specification: Pressed

Code: CPPJP



Ladder Coupler

Material: Q235 / S235JR
Surface: Galvanized
Specification: Pressed

Code: CPPLA



Limpet Coupler

Material: Q235 / S236JR
Surface: Galvanized
Specification: Pressed

Code: CPPLI



Right Angle Coupler

Material: Q235 / S235JR
Surface: Galvanized
Specification: Pressed

Code: CPPRA



Sleeve Coupler

Material: Q235 / S235JR
Surface: Galvanized
Specification: Pressed

Code: CPPSL



Beam Coupler

Material: Q235 / S235JR
Surface: Galvanized
Specification: Pressed

Code: CPPBE



Board Coupler

Material: Q235 / S235JR
Surface: Galvanized
Specification: Pressed

Code: CPPBO

*For other types of Couplers, please contact our sales staff.

Ringlock Scaffolding

Jack



Base Jack (Hollow)						
Code#	Length			Diameter	Thickness	Plate
	cm	mm	inch	mm	mm	mm
BJH403445	40	400	16"	34	4	150x150x5
BJH403446						150x150x6
BJH603445	60	600	24"			150x150x5
BJH603446						150x150x6
BJH403845	40	400	16"	150x150x5		
BJH403846				150x150x6		
BJH603845	60	600	24"	38		150x150x5
BJH603846				150x150x6		
BJH783845	78	780	31"			150x150x5
BJH783846				150x150x6		
BJH604848	60	600	24"		4	
BJH604858				5		
BJH824848				4		
BJH824858				5		
				48		150x150x8

Base Jack (Solid)						
Code#	Length			Diameter	Thickness	Plate
	cm	mm	inch	mm	mm	mm
BJS40304	40	400	16"	30	/	120x120x4
BJS40305						120x120x5
BJS60304	60	600	24"			120x120x4
BJS60305						120x120x5
BJS40324	40	400	16"	32		120x120x4
BJS40325						120x120x5
BJS60324	60	600	24"			120x120x4
BJS60325						120x120x5
BJS40345	40	400	16"	34		120x120x5
BJS60345	60	600	24"			

Swivel Base Jack (Hollow)



Length 600mm / 24"
Diameter 34mm / 1.4"
Code# SBJ603445

Socket Jack (Hollow)



Length 600mm / 24"
Diameter 34mm / 1.4"
Code# SJ60344



Fork Head Optional

Head Jack (Hollow)						
Code#	Length			Diameter	Thickness	U-Plate
	cm	mm	inch	mm	mm	mm
HJH403445	40	400	16"	34	4	150x120x50x5
HJH603445	60	600	24"			
HJH403846	40	400	16"			
HJH603846	60	600	24"	38		150x150x50x6
HJH783846	78	780	31"			
HJH604848	60	600	24"	48	4	180x150x50x8
HJH604858					5	
HJH824848					4	
HJH824858	82	820	32"		5	

Head Jack (Solid)						
Code#	Length			Diameter	Thickness	U-Plate
	cm	mm	inch			
HJS40304	40	400	16"	30	/	150x120x50x4
HJS40305						150x120x50x5
HJS60304			24"			150x120x50x4
HJS60305		150x120x50x5				
HJS40324	40	400	16"	32		150x120x50x4
HJS40325						150x120x50x5
HJS60324			24"			150x120x50x4
HJS60325	60	600		34		150x120x50x5
HJS40344			16"		150x120x50x4	
HJS40345					150x120x50x5	
HJS60344	60	600	24"		150x120x50x4	
HJS60345					150x120x50x5	

Ringlock Scaffolding

Accessories



8' Caster with Lock

Material: Q235 / S235JR

Surface: Hot-dip Galvanized

Specification: Forged

Code: CASTER8



12' Caster with Lock

Material: Q235 / S235JR

Surface: Hot-dip Galvanized

Specification: Forged

Code: CASTER12



Double Wedge Head

Material: Q235 / S235JR

Surface: Hot-dip Galvanized

Specification:

Code: RDWH



Rosette Clamp

Material: Q235 / S235JR

Surface: Hot-dip Galvanized

Specification:

Code: RRC



Eye Bolt

Material: Q235 / S235JR

Surface: Hot-dip Galvanized

Specification:

Code: EB



Eye Bolt

Material: Q235 / S235JR

Surface: Hot-dip Galvanized

Specification:

Code: EBF



Wall Tie

Material: Q235 / S235JR

Surface: Hot-dip Galvanized

Specification:

Code: WT



Wall Tie

Material: Q235 / S235JR

Surface: Hot-dip Galvanized

Specification:

Code: WTL



Pig Tail Pin

Material: Q235 / S235JR

Surface: Hot-dip Galvanized

Specification:

Code: P-PT



Base Collar

Material: Q235 / S235JR

Surface: Hot-dip Galvanized

Specification:

Code: RSBC



Spigot Adapter Clamp

Material: Q235 / S235JR

Surface: Hot-dip Galvanized

Specification:

Code: RSSACO



Spigot Adapter Clamp

Material: Q235 / S235JR

Surface: Hot-dip Galvanized

Specification:

Code: RSSACU



Spigot Adapter Clamp

Material: Q235 / S235JR

Surface: Hot-dip Galvanized

Specification:

Code: RSSACG



Leg Lock

Material: Q235 / S235JR

Surface: Hot-dip Galvanized

Specification:

Code: RSRSLC



Base Plate

Material: Q235 / S235JR

Surface: Hot-dip Galvanized

Specification:

Code: BP

*For other accessories of Ringlock Scaffolding, please contact our sales staff.

RFQ List

[illegible][illegible]

ADD: Room 302, Unit 2, East 109, Yongsheng Community, Yiwu,
Zhejiang, China
TEL: +86-15967929706
Email: contact@onon-bm.com
ZIP: 322000
WEB: www.onon-bm.com

Ringlock

Scaffolding



STANDARD

EN74 ● EN12811 ● BS1139 ● AS1576

Yiwu Onon Building Materials Co., LTD

